



TC-R3220 Spec: I/B/P/H

H.265 2HDD 20ch Enhanced PSE NVR

Lite-H Series



KEY FEATURES

HD Input

- Plug and play
- S+265/H.265/H.264 video formats
- Connectable to third-party network cameras
- Up to 20 IP cameras can be connected
- 16 PoE ports
- Supports live view, storage and playback of connected camera at up to 12MP resolution

HD Output

- 1×HDMI and 1×VGA simultaneous output
- HDMI Video output at up to 4K (3840 × 2160) resolution

HD Storage

- 2 SATA interfaces connectable for recording and backup on the front panel
- S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- 1×RJ45 self-adaptive 10/100/1000 Mbps network interfaces
- PoE port: 16×RJ45 self-adaptive 10/100 Mbps network interfaces

Various Applications

- Centralized management of IP cameras, including configuration, parameter import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Tiandy, recording, playing back and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to make the playback efficiency
- Web6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade
- Support 250m long-distance transmission



SPECIFICATIONS


Input	
Video Input	20-ch
Max Resolution	12MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 200Mbps; Outgoing 200Mbps
Output	
HDMI/VGA Output	HDMI 1-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
	VGA 1-ch, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
Screen Split	1/3/4/6/8/9/10/13/16/20A/20B
Audio Output	1×RCA
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	3×12MP, 4×8MP, 4×6MP, 5×5MP, 8×4MP, 9×3MP, 16×1080P, 20×720P, 20×4CIF
Synchronous Playback	3×12MP, 4×8MP, 4×6MP, 5×5MP, 8×4MP, 9×3MP, 16×1080P, 16×720P
Records Encryption	Yes
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	N/A
Array Type	N/A
External Interface	
Network Interface	1×RJ45 self-adaptive 10/100/1000 Mbps network interface
USB Interface	1×USB 2.0, 1×USB 3.0
Serial Interface	N/A
Alarm In/Out	0/1
Network	
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
System Compatibility	ONVIF (PROFILE S/T/G), SDK, P2P
POE	
POE Interface	16×RJ45 self-adaptive 10/100 Mbps network interface
Power per POE Port	30W
Max Current per POE Port	600mA
General	
Operation System	LINUX
Processor	ARM Cortex Dual Core
Web Version	Web6
Language	Simple Chinese, Traditional Chinese, English, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Polish, Dutch, Hebraism, Arabic, Vietnamese
Operating Conditions	-10℃~55℃, 10%~90% RH
Power Supply	100~240V AC, 50~60 Hz
Consumption (without HDD)	≤25W (without HDD)
Chassis	1U
Dimensions	47.5×277×440mm, (1.87×10.91×17.32 inch)
Weight (without HDD)	3.08Kg (6.78lb)




AVAILABLE MODEL

TC-R3220 SPEC: I/B/P/H

DIMENSIONS (Unit: mm)

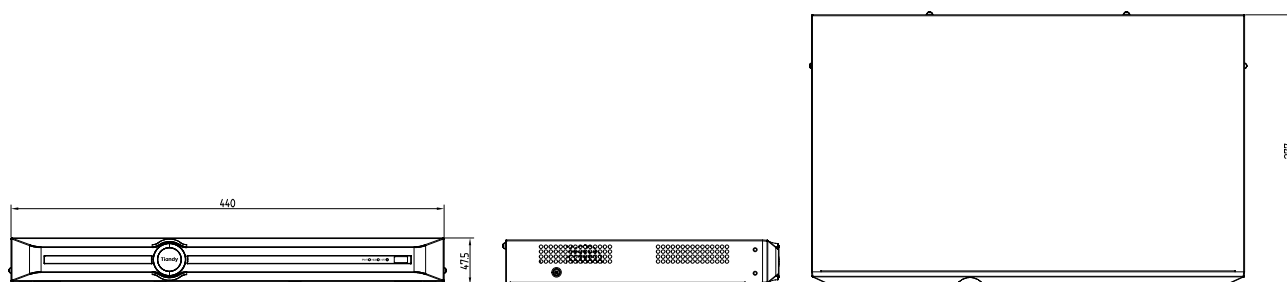

Physical Interfaces

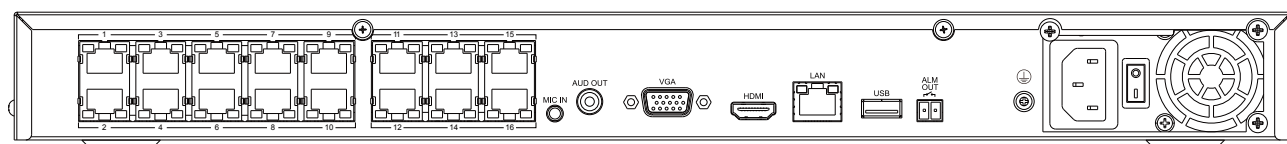

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com Tel: +86-22-58596178

Website: en.tiandy.com Fax: +86-22-58596048